
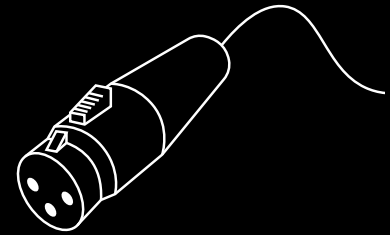



PIXERA SMPTE Timecode Interface

Technical product details



Product	PIXERA SMPTE Timecode Interface
Item number	PXZ-IF/SMPTE
Description	Send and receive LTC SMPTE Timecode
Supported Framerates	24 fps, 25 fps, 29.97 fps, 30 fps
Max. input voltage	3.3 volts (recommended operation conditions 0 to 3.0 volts)
Output voltage	3.3 volts
Jitter	50ppm (0.005%)
PC connector type	USB-A
Signal connector type	XLR female
Cable length	2m
Pinout	<p>Pin1: ground</p> <p>Pin2: signal</p> <p>Pin3: signal</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>FEMALE</p>  </div> <div style="text-align: center;"> <p>MALE</p>  </div> </div> <p>Balanced signal transmission. Polarity does not matter.</p>
Package contains	XLR gender changer